


BEULER

ADJUSTABLE TIME DELAY RELAY


2 SECONDS ~ 5 MINUTES

(Solid state timing circuit with variable resistor adjustment)

- 30 AMP, 12VDC
- SPST (form A) normally open
- Voltage range : 8.2 ~ 14.8 VDC
- Operating temperature range : -40c ~ 80c

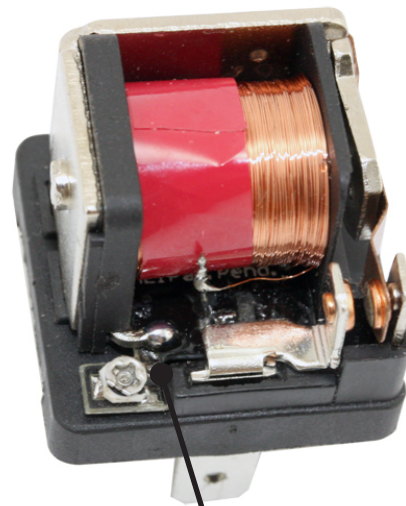

TIMER ADJUSTMENT



30) + 12VDC
85) Ground
86) +12VDC (Trigger)
87) +12VDC Out

